

BRIO-OX 47 is a surface aerator designed for great circulation, degassing and aeration effect. The powerful motors with which the aerator is supplied are the big brothers of the BRIO-OX range. This innovative system is the ideal solution for the oxygenation and degassing of huge volumes of water at the best efficiency rates and lowest energy consumption. Quick destratification of water basins, tanks and ponds is implemented thanks to the massive action of this cost-effective machine, which helps prompt recovery of the





FEATURES

- Sturdy and durable
- Suitable for use in freshwater as well as in salt water
- Floating and dock mount support versions available
- Conveyor available to direct the flow in order to obtain a longer direct effect
- Lightweight, easy to handle and to move from tank to tank or from pond to pond

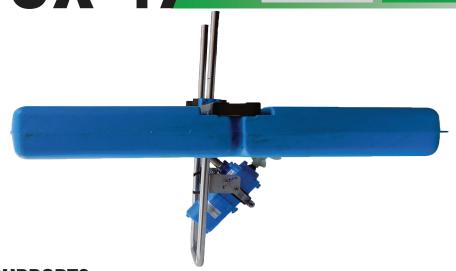

SUPPORTS



FLOATING INSTALLATION

Light-weight and easy to intsall, for standard aquaculture applications



DOCK MOUNTING INSTALLATION

Useful for lake de-icing, weeds/algae removal and destratification

SINGLE PHASE 230 V	THREE PHASE 400 V	NOM. POW. HP	NOM. POW. KW	AMP SINGLE PHASE	AMP THREE PHASE	CAPACITY L/M	R.P.M./1"	WEIGHT KG
BRIO-OX 47 1.5M BRIO-OX 47 P 2 M	BRIO-OX 47 1.5 T BRIO-OX 47 2 T BRIO-OX 47 P 3 T	1.5 2 3	1.1 1.5 2.2	7.5 10	7.5 10	3100 3700 5400	2800 2800 2800	16.5 20/17.5 20