


ACQUAECOREMEDY - USA

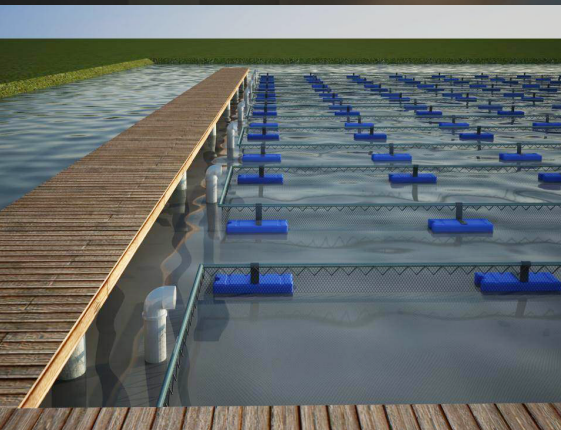

ELEWATER



High Performance Low - Head Water Lift

ELEWATER

The ELEWATER is a high flow and low-head water lift, with minimum energy consumption. This lift can circulate a very large volume of water.

Its circulation effect combined with its aeration and degassing action make the Elewater very useful in lakes and ponds where the need exists to transfer water from deeper layers to the surface in order to mix and oxygenate it at the same time.

This system help renovate and de-stratify which results in the concentration of nutrients being more evenly spread throughout the water column.

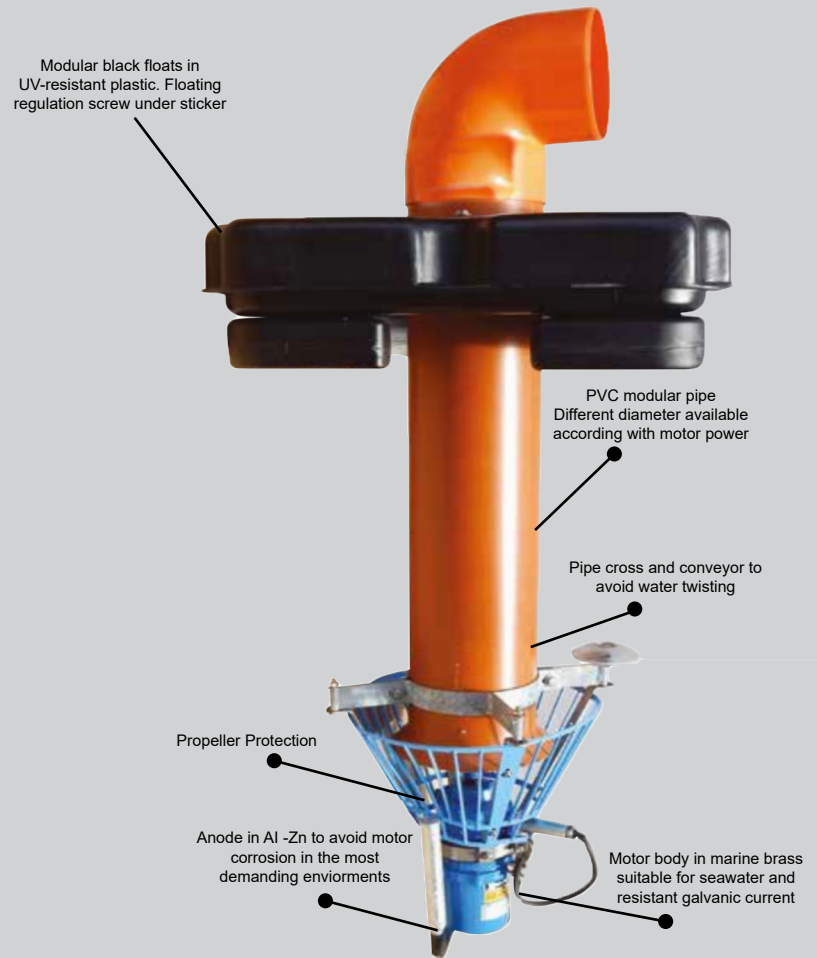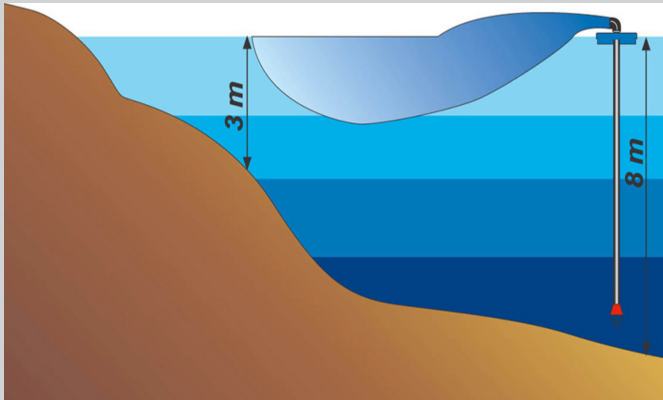

SUPPORTS



STATIC INSTALLATION

Fixed solution for standard applications suitable for deep tank applications



FLOATING INSTALLATION

Light-weight and easy to install, for standard aquaculture applications

FEATURES

- Ideal to enhance the recirculation water flow in RAS (Recirculating Aquaculture System) and to minimize energy consumption.
- Versatile and easy to move, where required and in cases when water needs to be transferred from one tank to another or from one basin to another.
- Floating or static support available
- Motor depth up to 10 meters

SINGLE - PHASE 230 V	THREE - PHASE 400 V	NOM. POW. HP	NOM. POW. KW	AMPERAGE SINGLE - PHASE	AMPERAGE THREE - PHASE	R.P.M./1"	WEIGHT KG
ELEWATER 0.5 M	ELEWATER 0,5 T	0,5	0,37	2.7	1.7	1650	13
ELEWATER 1 M	ELEWATER 1 T	1	0,75	6.0	2.5	1650	20
ELEWATER P 1,5 M	ELEWATER P 1,5 T	1.5	1.1	8.0	2.9	1650	23